Installation Instructions
Core 3” Square Flanged Trim - Universal Housing
for *CR3D-SA, CR3D-SF, & CR3WW-SF*

Cautions and Warnings

1. This product must be installed in accordance with the applicable installation code by a licensed electrician familiar with the construction and operation of the product and hazards involved.
2. Power must be OFF when connecting the fixture. "hot plugging" the light engine and driver will damage the LED source.
3. The light engine is low voltage and is factory wired to the driver DO NOT CONNECT LIGHT ENGINE TO MAINS AC POWER.
4. LEDs should be protected from dust and debris during during installation and maintenance.
5. Not to be used for temporary lighting.

Step A

Install hanger bars through slots on sides or ends of housing

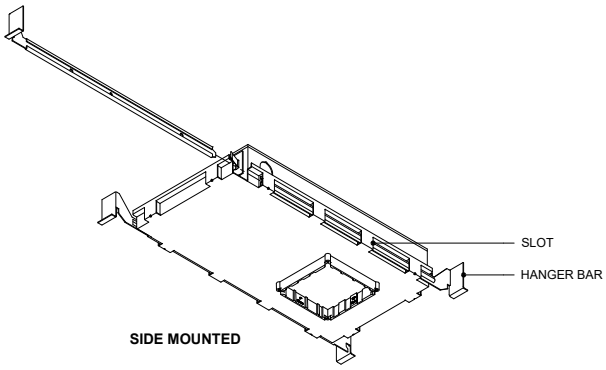

SIDE MOUNTED

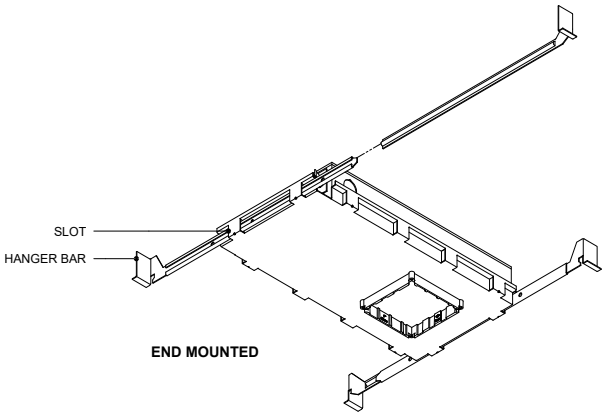

END MOUNTED

Step B

Mount housing to structure using included hanger bars. Mount housing so housing face is coplanar with the bottom of the framing member, top side of ceiling.

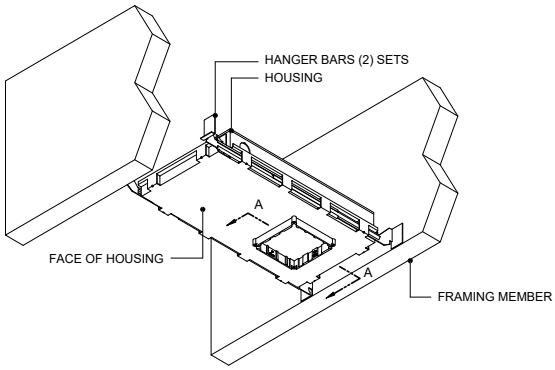

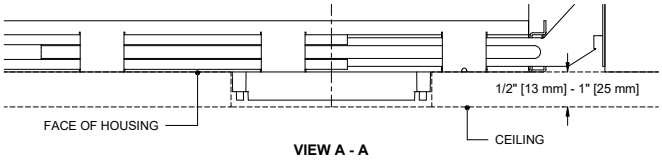

VIEW A - A

Step C

Make electrical connections through access cover on side of housing. Replace cover after completing connections.

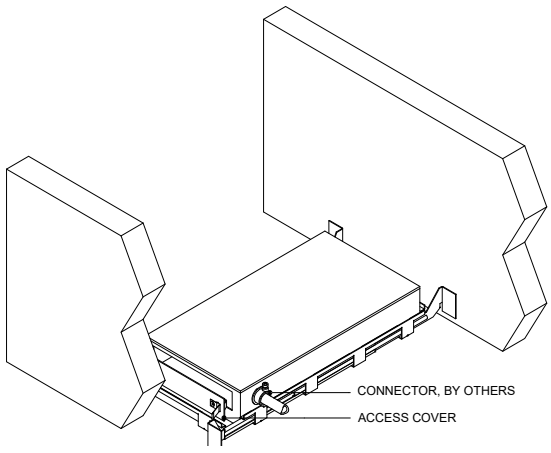

*** LED'S SHOULD BE PROTECTED FROM DUST AND DEBRIS DURING INSTALLATION AND MAINTENANCE*

Click here to read full Care and Maintenance

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A -October 2026

Step D

Cut 3 - 5/8" [92 mm] square cut-out in ceiling.

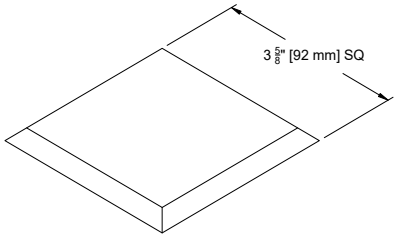

Step E

Install ceiling assuring cut-out aligns with center of housing throat. Paint and finish ceiling before installing trim. Ensure inside of throat remains free of paint and debris.

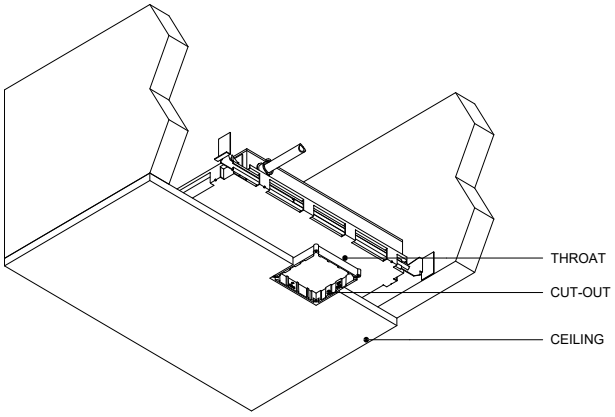

Step F

Install trim receiver into throat with screws provided. Align notch in receiver with ceiling thickness required. (1/2", 5/8" etc.)

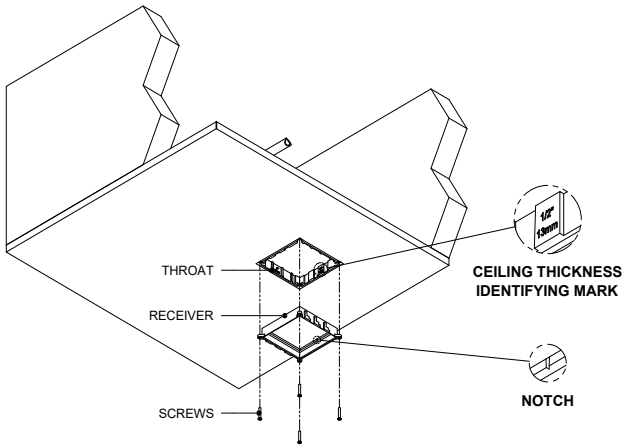

Step G

Push trim into receiver until springs catch the top of the receiver and flange of the trim is flush against the ceiling.

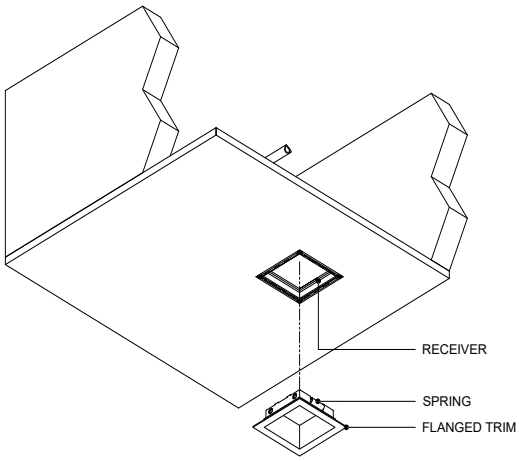

Step H

Remove trim by pulling downward on trim until springs disengage from receiver. If trim is lensed push lens up and grab trim to remove.

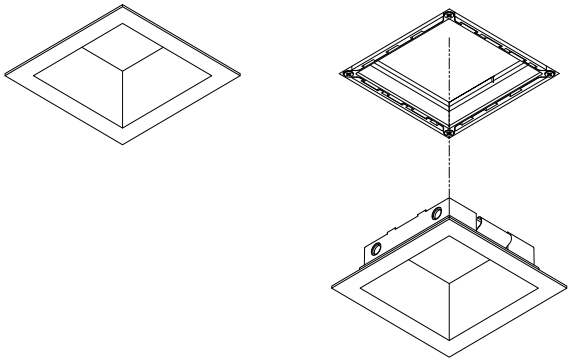

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A -October 2026