



Cautions and Warnings


- This product must be installed in accordance with the applicable installation code by a licensed electrician familiar with the construction and operation of the product and hazards involved.
- Power must be OFF when connecting the fixture. "hot plugging" the light engine and driver will damage the LED source.
- The light engine is low voltage and is factory wired to the driver DO NOT CONNECT LIGHT ENGINE TO MAINS AC POWER.
- **4.** LEDs should be protected from dust and debris during during installation and maintenance.
- **5.** Polarity is important. Black must be connected to black and red connected to red.

Step A

Refer to cutsheet for ceiling cutout dimensions. Install blocking tied to framing based upon ceiling cut-out dimensions. Cut rectangular ceiling cut-out and install sheetrock so that ceiling cut-outs and blocking align.

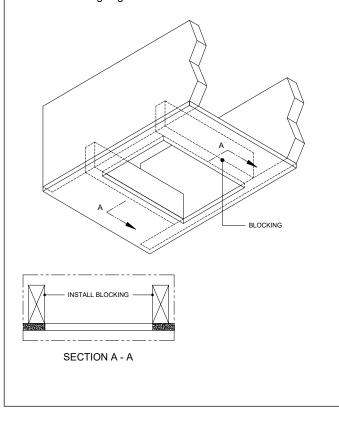




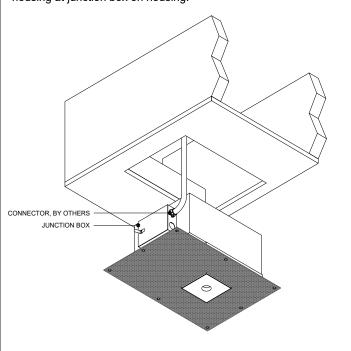

Step C

Step B

Lift housing into cut-out until mud flange is in contact with ceiling and flush all around. Secure housing to ceiling/blocking using appropriately sized sheetrock screws to engage blocking by 3/4"

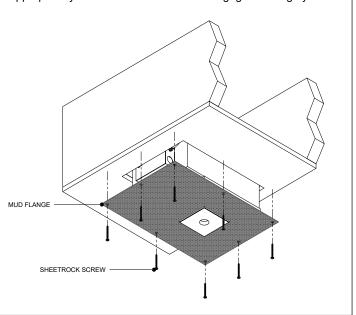

** LED'S SHOULD BE PROTECTED FROM DUST AND DEBRIS DURING INSTALLATION AND MAINTENANCE


Click here to read full Care and Maintenance






Step D


Finish ceiling, including mudding or plastering mud flange. (Take care not to get paint or joint compound inside throat.)



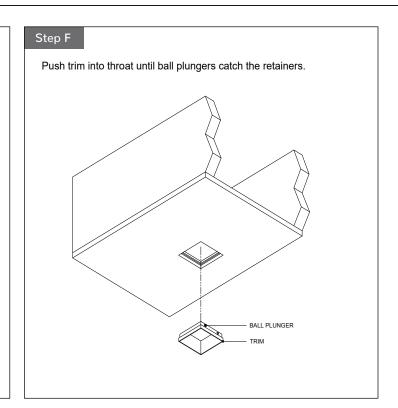

Step E

After ceiling is finished, remove installed aperture plug.



Step G

Remove trim by pulling downward on trim until ball plungers disengage from throat.

