

Single lamp, low-voltage halogen, recessed 2" (50mm) aperture down light. Flood aperture with low brightness parabolic reflector or glass aperture with decorative glass cylinder. General downlighting in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum
- ≈ Airtight construction suitable for direct contact with insulation

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral dimmable electronic or toroidal magnetic transformer
- 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection
- External thermoprotector

LAMP

- MR-16, 50w max. supplied by others

SOCKET

- Precision die-formed aluminum yoke with CNC machined lampholder assembly
- G4/G6 ceramic socket with high temperature, teflon coated lead wires

LENS

- Clear borosilicate aperture lens. Optional spread lenses available.

TRIM

- CNC machined spot cone, spun anodized aluminum flood cone or decorative glass cylinder

FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Additional colors, RAL palette, custom finishes available

LABELS



-  , US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight,



2 1/2" (64 MM)



REFLECTED PLAN VIEW
FLANGED TRIM

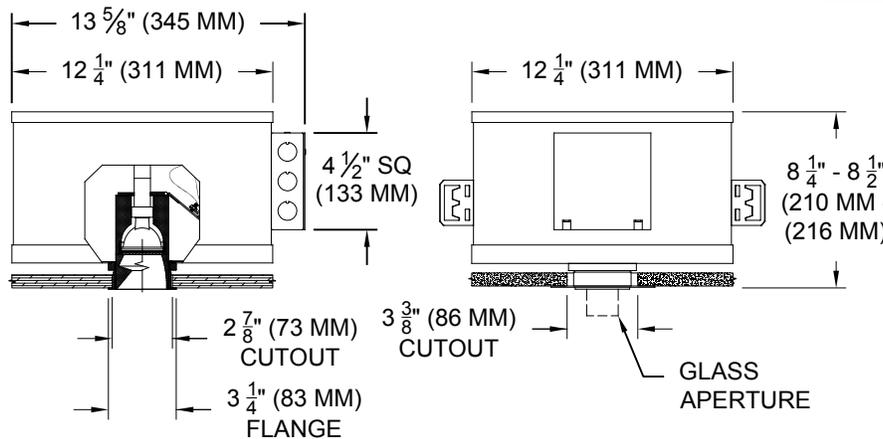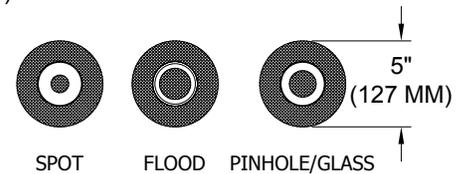

ORDERING INFORMATION

| 4500-MR16-AUH | TRIM | APERTURE | TRANSFORMER | TRIM FINISH | APERTURE LENS |
|----------------------------|--|--|---|--|--|
| Airtight Universal Housing | FT = Flanged Trim PT = Panel Trim ZT = Zero Trim | FA = Flood GA = Glass PA = Pinhole | EX=Electronic / 120v EXS=Elect. SORAA* / 220v / 240v / 277v *Standard 120v | CAA = Clear (FA) GAA = Gold (FA) P14 = White BLK = Black PXX = SLI Color CST = Custom | Blank = None 79A = Veiling Acrylic 91A = Solite 93A = Frosted |



Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX:732.517.0971