

ROUND SMALL APERTURE RECESSED DOWN LIGHT

4500-LEDX-AUH

Single lamp, solid state light engine, recessed 2" (50mm) aperture down light. Flood aperture with low brightness parabolic reflector or glass aperture with decorative glass cylinder. General downlighting in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum
- ≈ Airtight construction suitable for direct contact with insulation

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers. Also available for 120v phase control

LAMP

- Xicato LED supplied with fixture

SOCKET

- Precision CNC machined lampholder assembly

LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

TRIM

- Spun anodized aluminum reflector cone or decorative glass cylinder
- ST is flanged trim fully sealed and gasketed. Aperture lens required


FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Additional colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight, Chicago Plenum,  JA8 Approved

JOB: _____
SPECIFIER: _____
TYPE: _____
QUANTITY: _____
SIGNATURE: _____

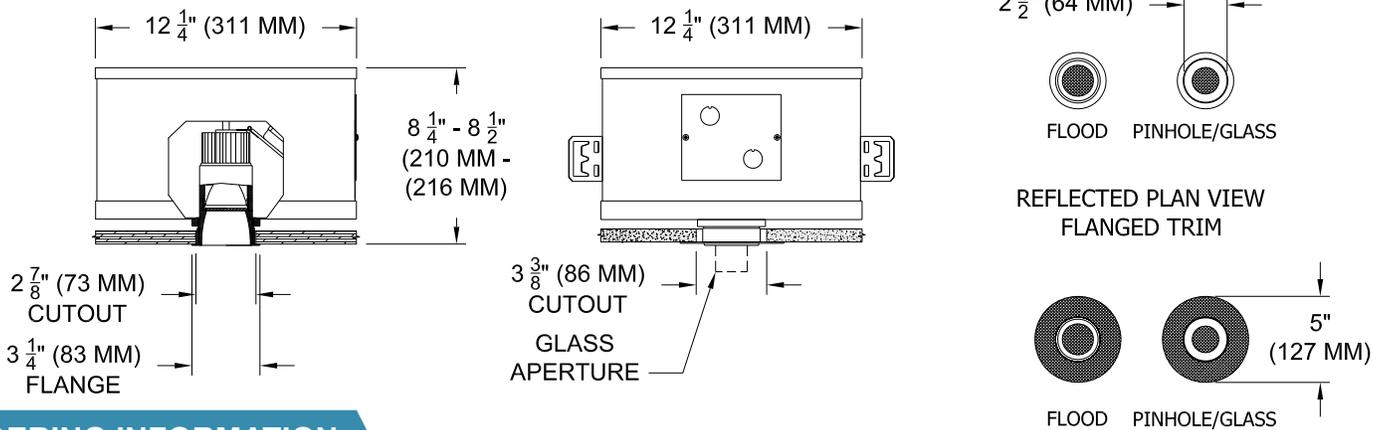

Hangar bars sold separately

ORDERING INFORMATION

4500-LEDX-AUH	TRIM	APERTURE	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
			/			
Airtight Universal Housing 8 = 80 CRI • 27 = 2700K • 9 = 98 CRI • 30 = 3000K 35 = 3500K 40 = 4000K	FT=Flanged Trim PT=Panel Trim ST=Shower Trim* ZT=Zero Trim *Aperture lens required	FA = Flood GA = Glass PA = Pinhole	• XT8 = 120v-277v, 8W 800lm • XT12 = 120v-277v, 12W 1055lm • C1 =0-10V dimming, 1%, 120-277v • C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) • E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v • E2 =EldoLED DALI, 0.1%, 120-277v • E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v • L2 =Lutron Hi-lume 1% 2-wire LED driver (120v forward phase) • LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	30 = 30 Degrees 40 = 40 Degrees	CAA = Clear (FA) GAA = Gold (FA) P14 = White BLK=Black PXX = SLI Color XXXX = RAL# CST = Custom	Blank= None 79A= Veiling Acrylic 91A= Solite 93A= Frosted

*ELDO and Lutron are remote mounted

• California Title 24- JA8 Approved



Patent Pending. These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971