

Single lamp, solid state light engine, recessed 2" (50mm) aperture down light. Flood aperture with decorative regressed trim. General downlighting in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction

## SPECIFICATIONS

### HOUSING

- Precision die-formed heavy gauge aluminum

### MOUNTING

- Recessed in architectural ceiling

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control

### LAMP

- Citizen LED supplied with fixture

### SOCKET

- Precision CNC machined lampholder assembly

### LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

### TRIM

- Spun anodized aluminum reflector cone or decorative glass cylinder

### FINISH

- Aperture trim available in black and white as standard
- Additional colors, RAL palette, custom finishes available

### LABELS

-  US, US tested to UL standards 1598, Damp location



**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_


**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_


**SIGNATURE:** \_\_\_\_\_

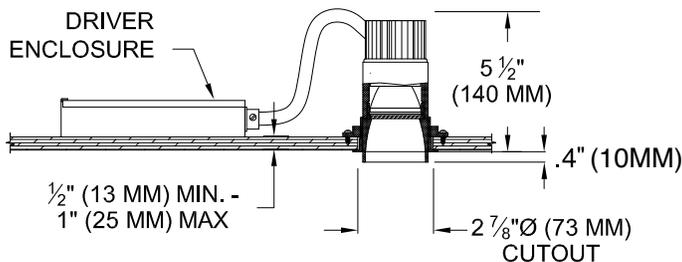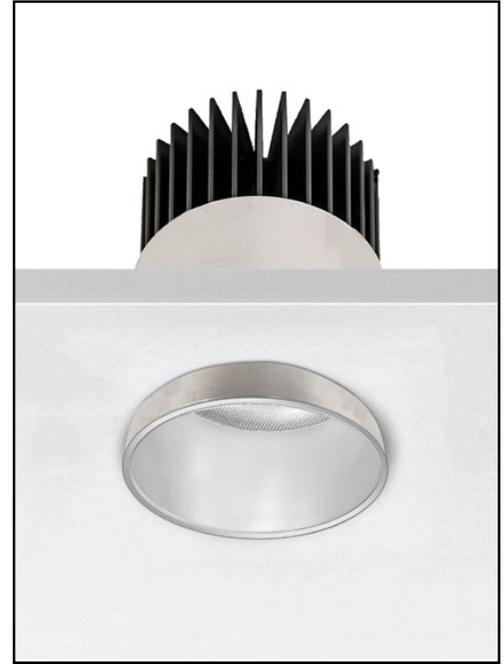

DECORATIVE REVEAL



FLANGED (FT) / FLOOD (FA)

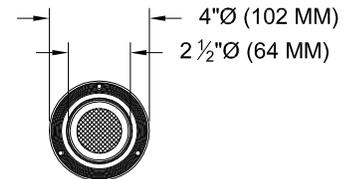

ZERO (ZT) / FLOOD (FA)

## ORDERING INFORMATION

4600-LEDZ-ZH	TRIM	APERTURE	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
		FA	CZ14 /			
Zero Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	FT=Flanged Trim ZT=Zero Trim *Aperture lens required	FA = Flood	CZ14=120-277v, 14W 1100lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black (LDE1) LTP =Hi-lume Premier 0.1%, Fade-to-Black digital Ecosystem, 120-277v (PEQ0)	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees	CAA = Clear (FA) P14 = White BLK=Black A26 = Brass A28 = Copper	Blank= None 79A= Veiling Acrylic 91A= Solite 93A= Frosted

\*ELDO and Lutron are remote mounted